


PowerWalker AS/400 Card 3

AS/400 Card

Provides contact closure for monitoring UPS

Offer different dry-contacts

Suitable for IBM server, Personal PC and workstations equipment's, auto-controlled industrial equipment and communication applications.

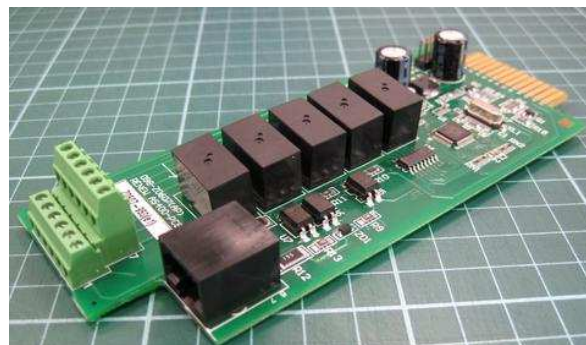

Item-No. 10120528

The PowerWalker AS/400 card 3 provides contact closures for remote monitoring of your UPS. To meet different application requirement, the AS/400 card 3 is capable of selection the status of the dry-contact signal (active close or active open) by terminal emulation program though the RJ45 connector.

Product Features

For more details download see manual on our website

Supports following models:

VFI 1000RT/1500RT/2000RT/3000RT/6000RT/10000RT LCD

Dry Contact Signal Pin Definition		
Segment	Pin No.	I/O
Segment 1	Pin 9 & Pin 2	O/P
Segment 2	Pin 10 & Pin 3	O/P
Segment 3	Pin 11 & Pin 4	O/P
Segment 4	Pin 12 & Pin 5	O/P
Segment 5	Pin 13 & Pin 6	O/P
Segment 6	Pin 8 & Pin1	I/P
Segment 7	Pin 14 & Pin1	I/P
Segment 8	Pin 7 & Pin1	I/P

RS232 Signal Pin Definition		
Pin Assignment	Function Description	I/O
RJ45, Pin 3	TXD2	O/P
RJ45, Pin 6	RXD2	I/P
RJ45, Pin 4	GND	GND

User Interface

EK381V4L Connector (Dry Contact):

RJ45 Connector with CABLE RJ45 TO DB9 (F):

RJ45	DB9
3	2
4	5
6	3

Technical Details

Power Specifications

DC Input Voltage	Max. 30V
DC Current	Max. 1.0A
Suitable Application	IBM Server, Personal PC & Workstations equipment, Auto-controlled industrial equipment & communication applications
Communication Port	Terminal block

Product Details

Dimensions	146 x 60 x 1.6 mm
Colour	Black
Weight	70g
Model Code	AS-400 card 3

Environment

Temperature	0°C – 45°C
Humidity	0 - 95% RH (non- condensing)

Logistic Data

Item Number	10120528
EAN Code	4260074974577
Warranty	24 Months

Version: EN 02/05/2012

We reserve the right for technical changes and mistakes